


Sponsors



APSAEM08

Bangkok, Thailand, **July 24-25, 2008.**

Organized by Department of Electrical Technology Education,
King Mongkut's University of Technology Thonburi (KMUTT)



Noncontact Positioning Mechanism Using Pinning Effect and Electromagnets

K. Oka¹, M. Sakamoto², S. Nakamura¹

¹Kochi University of Technology, Miyakuchi 185, Tosayamada-cho, Kochi, Japan

²Kanematsu Engineering, Nunoshida, Kochi, Japan

This paper describes a proposal of noncontact positioning system using pinning effect of superconductor. The proposed system consists of a superconductor, electromagnets, and actuators. The levitation force is obtained from the pinning force between a superconductor and an electromagnet and is controlled by a current switch. The pinning of electromagnet is not used for only levitation, but hold the position of the levitated object. The positioning system is moving like an inchworm system. A prototype of proposed system is introduced and some experimental results are shown. These results verify the feasibility of the proposed noncontact positioning system.

Keywords: noncontact positioning system, pinning effect, inchworm mechanism.

1. INTRODUCTION

There are many kinds of noncontact levitation mechanism[1][2]. Noncontact levitation mechanism is effective for reducing friction, abrasion, maintenance, vibration, noise, and so on. To realize noncontact levitation electromagnetic suspension system (EMS system) is a major method because of its easy generation and control of force. However, usual magnetic levitation systems need closed loop control, and its device becomes larger and complicated. Superconductive magnetic levitation mechanism can get the levitation stability without active control and can easily realize levitating. Furthermore, a permanent magnet levitating over high temperature superconductor has a pinning force and has a self positioning function by itself. Levitation system using pinning effect is very simple and useful system because of no need of the feedback control and enough levitation force. Some positioning systems with pinning effect have been proposed[3]-[5].

This paper is a proposal of noncontact positioning system using pinning effect of superconductor. The proposed system consists of a superconductor, electromagnets, permanent magnets and actuators. The levitation force is obtained from the pinning force between a superconductor and an electromagnet and is controlled by a current switch. The pinning of electromagnet is not used for only levitation, but hold the position of the levitated object. The positioning system is moving like an inchworm system.

2. EXPERIMENTAL SYSTEM

Three types of experimental device were made. They use electromagnets for their levitation mechanism. For their positioning mechanism, one of them uses a piezoelectric actuator, and other two devices use electromagnets and permanent magnets.

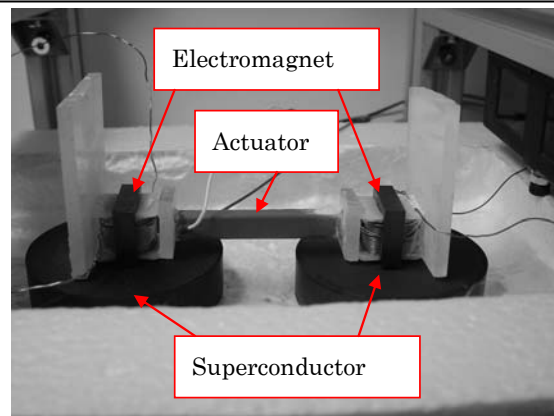


Fig. 1 Photograph of device I which uses a piezoelectric as its actuator

2.1 Experimental Device I

A photograph of the experimental device I is shown in Fig. 1. As shown in the figure, two electromagnets are connected by an actuator of piezoelectric which changes the length between left and right magnets. Two superconductors are used for levitation and positioning because of its size. Two electromagnets are controlled by on-off switch and so is the actuator.

An electromagnet has an E shaped ferrite core and a coil of 150 turns. Its size is about 10mm cubic. The flux under the core is 60mT at the current of 2A. The piezoelectric actuator is made by NEC Tokin and the length of 45mm. Maximum displacement is 28 μ m at the voltage of 150V.

The principle of the positioning mechanism is shown in Fig. 2. These illustrations are views from the top of the device and indicate the procedure when the device is moving to the right. Each illustration explains the procedure as follows.

1. The device is in the initial state which means the device is stably levitated by pinning effect levita-

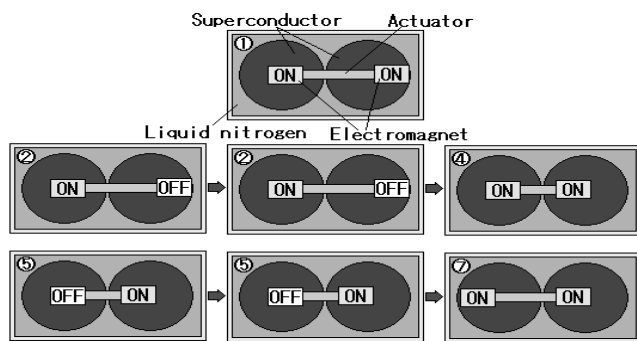


Fig. 2 Principle of positioning mechanism for device I.

tion mechanism. Two switch of the magnets are on and the actuator is expanded.

2. The right electromagnet current is changed to turn off.
3. The actuator is contracted and the right magnet moves to the left, because the left magnet is held at same place by pinning effect.
4. The right magnet is turned to on, and is held by pinning effect.
5. The right electromagnet is turned to off and remove pinning effect.
6. The actuator is expanded and the right magnet moves to the left.
7. The right magnet turned to on.

When the device is made to move to the right the inverse procedure may be adopted. This device has the problem that the piezoelectric actuator is weak in low temperature and easy to break.

2.2 Experimental Device II

A photograph of the experimental device II is shown in Fig. 2. As shown in the figure, the device II consists of three electromagnets, two permanent magnets, and springs. Three electromagnets are all used for levitation. All coils are wound about the horizontal axis. The magnets A and C are only used for levitation. Spring force and the attractive force between the magnet B and two permanent magnets are used for the positioning of the device. Two permanent magnet are attached to the electromagnet A and C, and their direction of the magnetic pole is set as the same poles are inside. This device uses the electromagnet B shown in the figure as the actuator for positioning.

The principle of the positioning mechanism of the device II shown in Fig. 4. When the permanent magnets face the N pole to the inside, the rightward moving procedure is as follows

1. After cooling the superconductor, the device is set over the superconductor as is levitated. The magnet A and C is on, B is off. The springs are set to the natural length.
2. The electromagnet B is excited as the flux passes from the left to the right.
3. The magnet A is turned to off. As pinning effect is removed and the attractive force between the magnet B and the left permanent magnet is acted

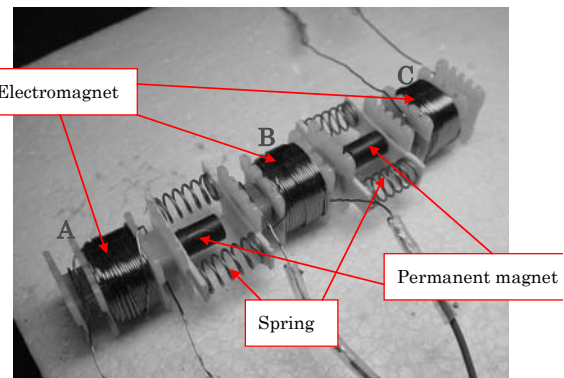


Fig. 3 Photograph of device II which uses a electromagnet B as its actuator for positioning

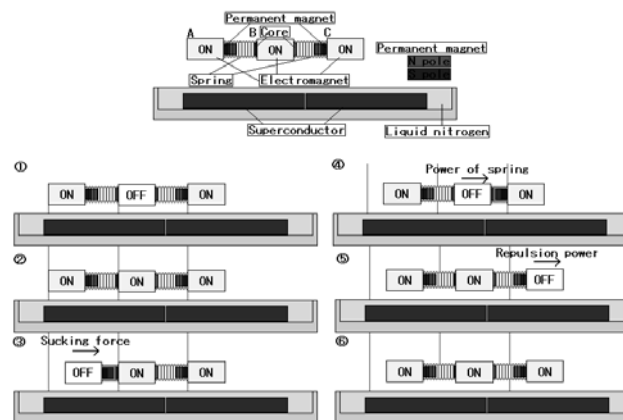


Fig. 4 Positioning procedure for device II

to the magnet A, the magnet A moves to the right.

4. The magnet A is turned to on and the magnet B is turned to off. As the pinning effect of the magnet B is removed, the magnet B is positioned as the center between the magnet A and B.
5. The magnet B is turned to on and the magnet C is turned to off. As pinning effect of the magnet C is removed and the repulsive force between the magnet B and the right permanent magnet is acted, the magnet C moves to the right.
6. The magnet C is turned to on. And after that the magnet B is turned to off and the state returns to the initial.

The device can be moved to the leftward by the inverse current adoption to the magnet B.

2.3 Experimental Device III

The device III is an improved version of the device II. The photograph of the device III is shown in Fig. 5. The differences are the number of the coil and the cores and the direction of the coils in both side of the electromagnets. The device III has the structure that is easy to generate the levitation force by both side of the magnets.

The procedure for positioning is shown in Fig. 6. It is almost same as the device II. The device III can be

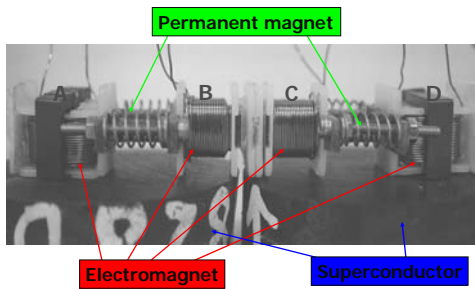


Fig. 5 Photograph of device III

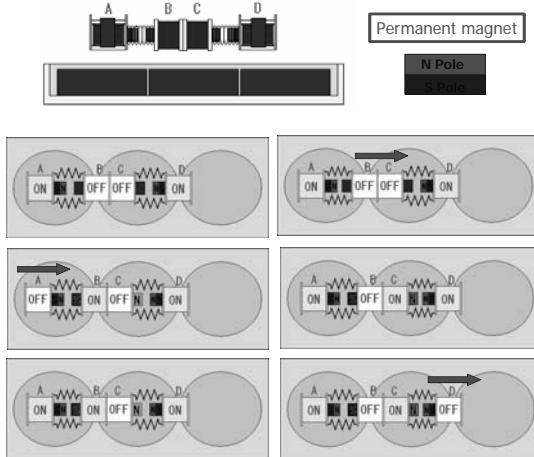


Fig. 6 Positioning procedure for device III

controlled more delicately than device II. The center magnet divided into two coil and they can be excited individually.

3. EXPERIMENT

For the feasibility study, above mentioned devices have been examined by experiment. Experiments are carried out on levitation examination using one electromagnet and positioning examinations using three types of devices.

3.1 Experiment of Levitation

First, levitation performance of the electromagnet has been examined. The experimental setup is shown in Fig. 7. An electromagnet is set on the superconductor after cooling it. The vertical movement of the magnet has been measured by a laser displacement sensor located upper the magnet during the switch of the magnet has been turned to off and on repeatedly.

The result is shown in Fig. 8. As shown in the figure, the magnet can be levitated according to the coil current. And we can recognize that the magnet is still levitating slightly when no current is applied. The reason is caused by the fact that pinning flux does not disappear nevertheless the current is zero.

3.2 Experiment of Device I

The positioning examination was carried out using the device I. The result is shown in Fig. 9. The inputs of

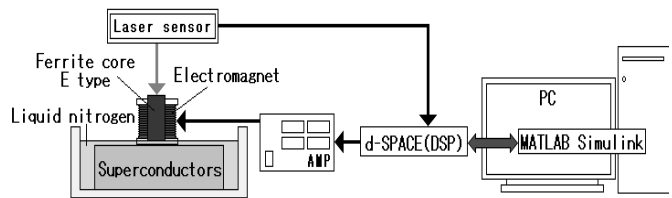


Fig. 7 Experimental setup for levitation

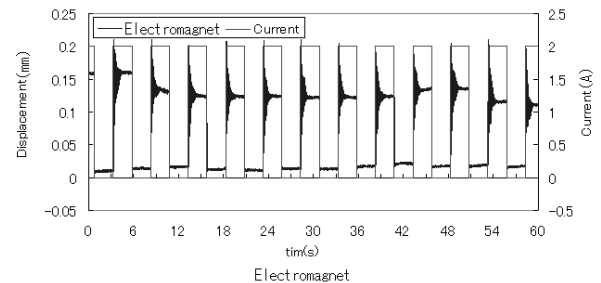


Fig. 8 Experimental result for vertical levitation

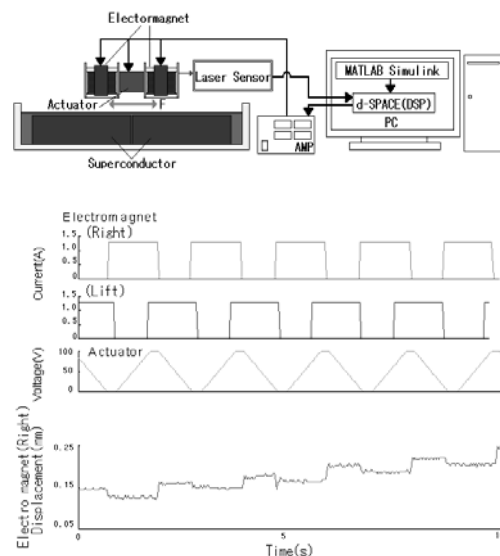


Fig. 9 Experimental result of device I

the magnet and the actuator and the output of laser displacement sensor which measures the movement of the right magnet are recorded.

As shown in the figure, we can see that the right magnet is driven to the left direction. The feasibility of the proposed positioning system was verified. The movement, however, is different from considered. The movement does not caused by the voltage of the actuator, but the on-off signal of the right magnet coil. The reason is considered as the pinning force is still acted when the current is zero. Also we may consider that as levitation was not realized, nonlinear friction force between the magnet and the superconductor might apply.

3.3 Experiment of Device II

A result of positioning experiment of the device II is shown in Fig. 10. The graph shows three input signals of the magnets and the displacement of the right magnet.

As the input signals are pulse wave, the displacement is pulse form. And it vibrates when the signal of the magnet C is on. It is caused by the spring which connects the magnets. However it is clearly confirmed that the device moves step by step.

The actuator which made of electromagnets, permanent magnets, and springs is useful for this positioning device because of light weight, simple structure, and endurance for cold circumstance.

3.4 Experiment of Device III

An experimental result of the device III is shown in Fig. 11. Recorded signals are four switch signals of the magnets and the displacements of both side magnets as shown in the upper figure.

Compare with the result of device II, there is no vibration during the positioning process. The device III has rods in the center of the springs as shown in Fig. 5. This rod may generate the friction force and suppress the vibration.

As shown in Fig. 11 we can see that the displacement of the left and the right magnet is different. The reason is that the left and the right attractive forces between the electromagnets and the permanent magnets may be different. However it is clearly confirmed that the device moves step by step.

4. CONCLUSION

Three new types of noncontact positioning systems using pinning effect of superconductor have been proposed and the feasibility of the proposed system was verified by experiments. The followings are conclusion of this work.

A device using piezoelectric has been made and succeeded about positioning examination. However we cannot confirm that the device maintains noncontact state and the motion is difference from predicted.

Devices using actuators of electromagnets and permanent magnets have been made and also succeeded about positioning. The actuator may be effective for the positioning and levitation, however the vibration remains because of using springs.

Precise and smooth noncontact positioning system using superconductor is the goal of this work. They will be a further study.

REFERENCES

- [1] B.V. Jayawant, "Electromagnetic Levitation and suspension Techniques", Edward Arnold, (1981).
- [2] H. Bleuler, "A survey of Magnetic Levitation and Magnetic Bearing Types", JSME International Journal III, Vol. 35-3, 335-342, (1992).
- [3] N. Kondo, Y. Tsutsui, T. Higuchi, "Magnetic Suspension using High Tc Superconductors and Soft Magnetic Materials and it's Application to a Contact-free Linear Guide", Proceedings of the Fifth International Symposium n Magnetic, JSME, 457-461, (1996).
- [4] M. Komori, G. Kamogawa, "Basic study of a

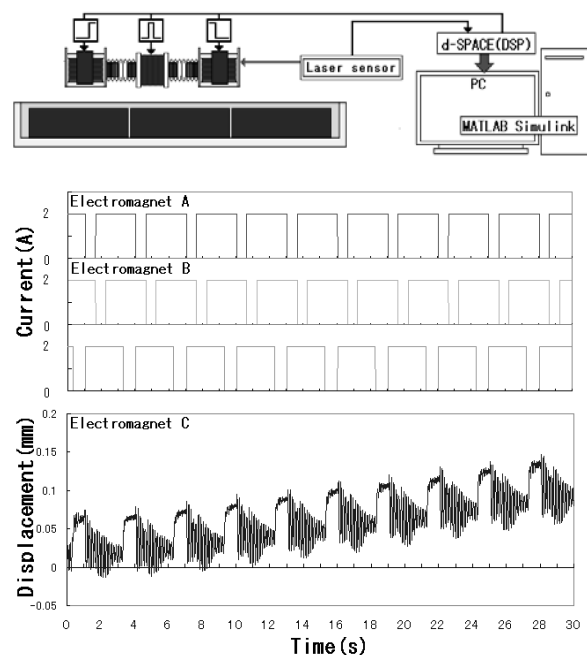


Fig. 10 Experimental result of device II

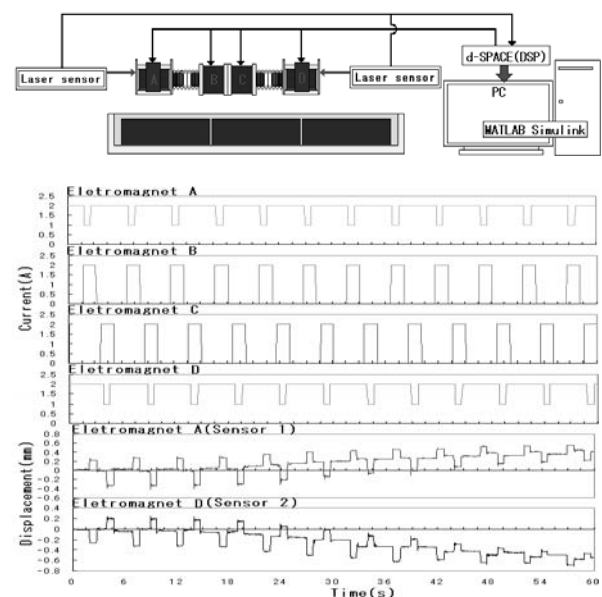


Fig. 11 Experimental result of device III

magnetically levitated conveyer using superconducting magnetic levitation", IEEE Trans. on Applied Superconductivity, Vol.15-2, 2238-2241, (2005).

- [6] S. Komatsu, K. Oka, H. Taguchi, M. Sakamoto, "Possibility of Positioning Mechanism for Superconductor Levitation System Using Stick-Slip Mechanism", Proceedings of the International Conference on Electrical Machines and Systems, Nagasaki, (2006) .